


UNION C/Z-PURLIN

SPESIFIKASI specification

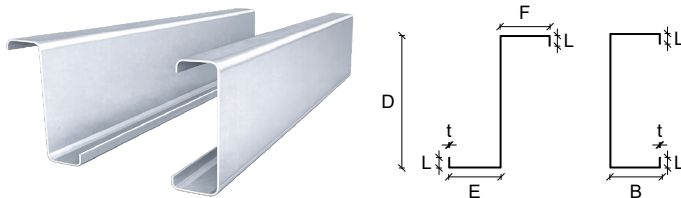

Yield strength G450
Coating galvanized Z275

No	Profil	Tinggi (D)	Tebal (t)	Lebar (B)	Lip (L)	Berat
		(mm)				(kg/m)
1	C.100.12	102	1,2	51	13,5	2,10
2	C.100.15	102	1,5	51	14,0	2,62
3	C.100.19	102	1,9	51	15,5	3,29
4	C.150.15	152	1,5	64	16,0	3,59
5	C.150.19	152	1,9	64	17,5	4,51
6	C.150.24	152	2,4	64	19,0	5,70
7	C.200.15	203	1,5	76	16,0	4,50
8	C.200.19	203	1,9	76	19,5	5,74
9	C.200.24	203	2,4	76	21,5	7,24
10	C.250.19	254	1,9	76	19,5	6,50
11	C.250.24	254	2,4	76	21,0	8,16
12	C.300.24	300	2,4	96	27,5	10,09
13	C.300.30	300	3,0	96	29,5	12,76
14	C.350.30	350	3,0	125	30,5	15,23

No	Profil	Tinggi (D)	Tebal (t)	Lebar (E)	Lebar (F)	Lip (L)	Berat
		(mm)					(kg/m)
1	Z.100.12	102	1,2	53	49	12,5	2,10
2	Z.100.15	102	1,5	53	49	13,5	2,62
3	Z.100.19	102	1,9	53	49	14,5	3,29
4	Z.150.15	152	1,5	65	61	16,5	3,59
5	Z.150.19	152	1,9	65	61	17,5	4,51
6	Z.150.24	152	2,4	66	60	19,5	5,70
7	Z.200.15	203	1,5	79	74	16,0	4,51
8	Z.200.19	203	1,9	79	74	20,0	5,74
9	Z.200.24	203	2,4	79	74	21,5	7,24
10	Z.250.19	254	1,9	79	74	19,0	6,50
11	Z.250.24	254	2,4	79	73	21,0	8,16
12	Z.300.24	300	2,4	100	93	28,0	10,09
13	Z.300.30	300	3,0	100	93	29,5	12,76
14	Z.350.30	350	3,0	129	121	31,5	15,23



1972

PT. UNION METAL

Quality Steel Building Material

A UNION SAMPOERNA CO.